


Hydraulic rotators

- Wide range of models, with shaft or flange, to provide the best solution for every need.
- High rotation torque in compact dimensions.
- Extreme manufacturing precision to guarantee reliability and durability.

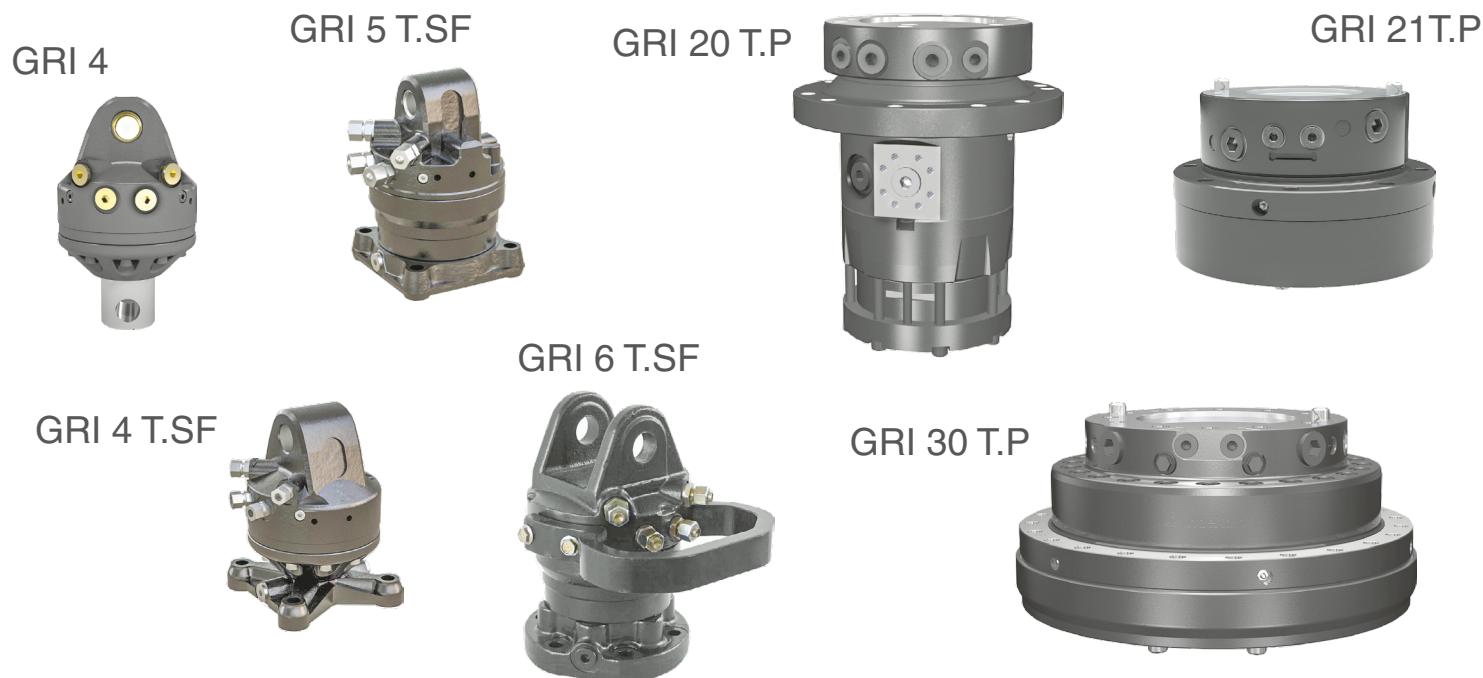

Technical data

MODEL	Application	Weight Kg	Max BAR	Load capacity Ton.	Torque Nm.	Recomm. oil flow rotation l/min.
GRI 3 T/F	small truck cranes	24	220	3	900	10-20
GRI 4 T		24	220	4,5	1200	10-20
GRI 4 T/F		29	220	4,5	1200	10-20
GRI 4 T/S		25	320	4,5	850	15-40
GRI 4 T/SF		27,5	320	4,5	850	15-40
GRI 4,5 T/SFF	medium-size truck cranes	26,5	320	4,5	850	15-40
GRI 5 T/S		25,5	320	4,5	850	15-40
GRI 5 T/SF		32	320	4,5	1000	15-40
GRI 6 T/SF	forest loader cranes medium excavators	47	320	6	1000	20-40
GRI 6 T/SFF		41	320	6	1000	20-40
GRI 10 T/SFF		60	320	10	2000	20-40
GRI 11 T/SF		58	250	10	2200	25
GRI 10 T/P	excavators and material handlers	71	320	10	1500	20-50
GRI 12 T/P		77	250	12	3000	28
GRI 17 T/SF		64	250	16	3300	35
GRI 20 T/P		150	250	20	4100	35
GRI 21 T/P		121	250	21	4350	35
GRI 30 T/P		220	250	30	7000	40