



Light-type log grapple

- Light grapple, suitable for not intense applications.
- Wide opening and very small gripping diameter when closed
- Safety valve is fitted as standard.
- Alloy steel pins and hardened bushings in all junctions.
- Entirely made of anti-yield DOMEX 690 steel.

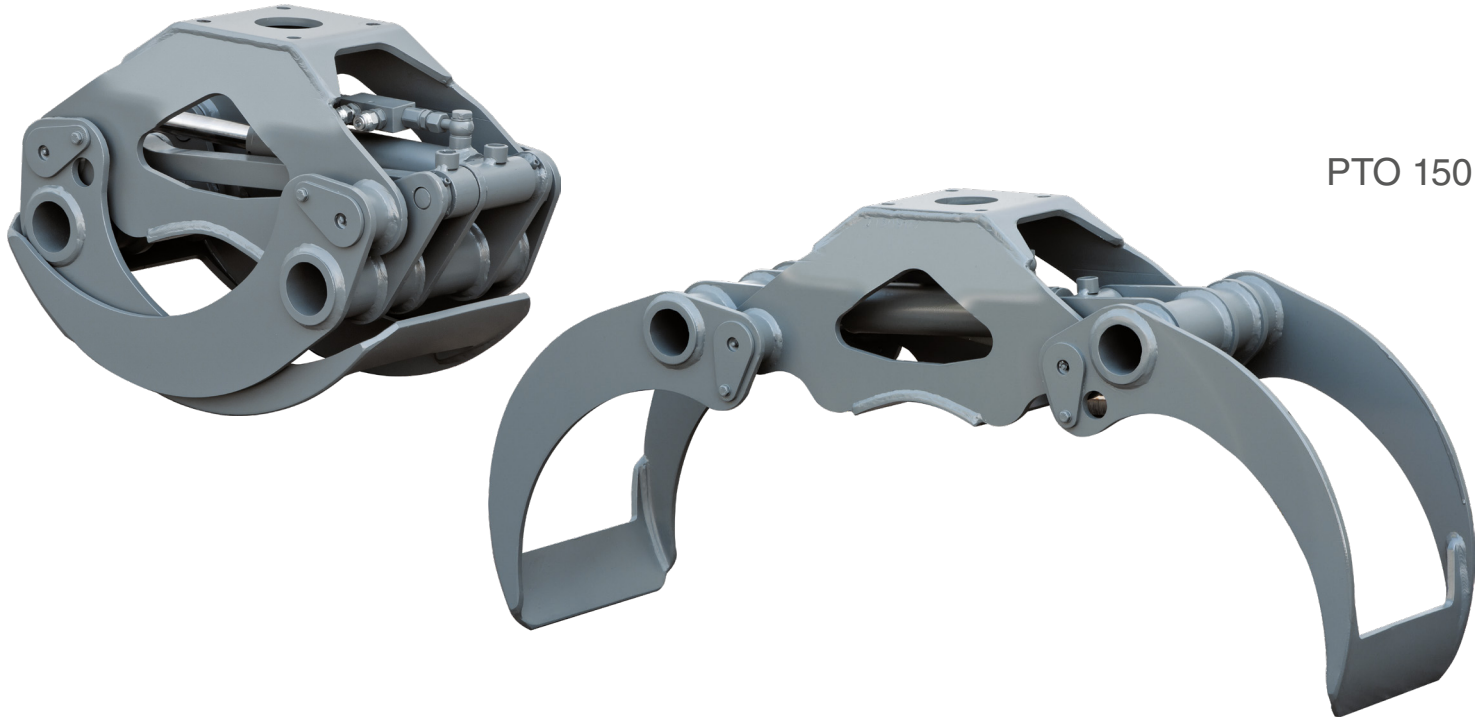

Model	Cap. m ³	Weight Kg	Max load daN	Max BAR	Ø A mm	B mm	C mm	D mm	E mm	F mm	G mm
PTO - 100	0,1	55	500	220	75	360	450	1065	275	340	560
PTO - 150	0,15	80	700	220	80	420	530	1250	320	400	660
PTO - 200	0,2	95	1000	220	90	470	595	1390	360	450	730
PTO - 300	0,3	155	1500	220	105	550	700	1640	420	500	860

Technical Data

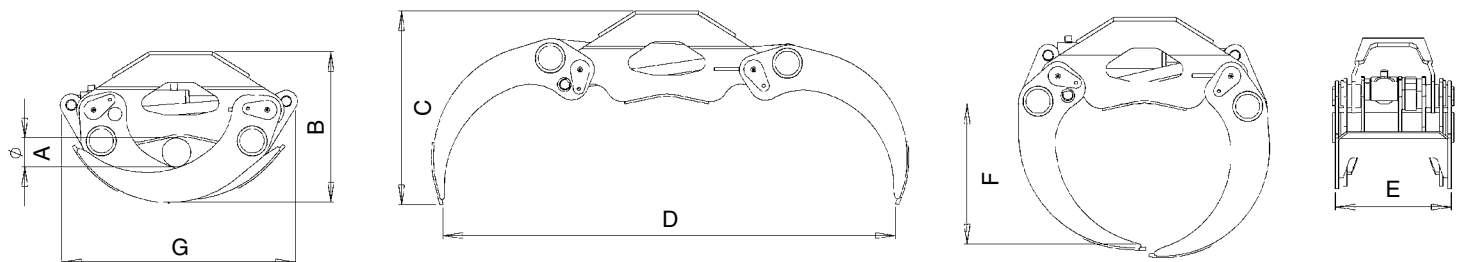

Accessories

Fixed head	Bolt-on head (without rotation)
GRM 4 T/F	Mechanical, free 250° rotation (without hydraulic supply)
GRI	Hydraulic continuous rotator
Top link for crane	Cardan suspension link for truck crane
Top link for excavator	Cardan suspension link for excavator