
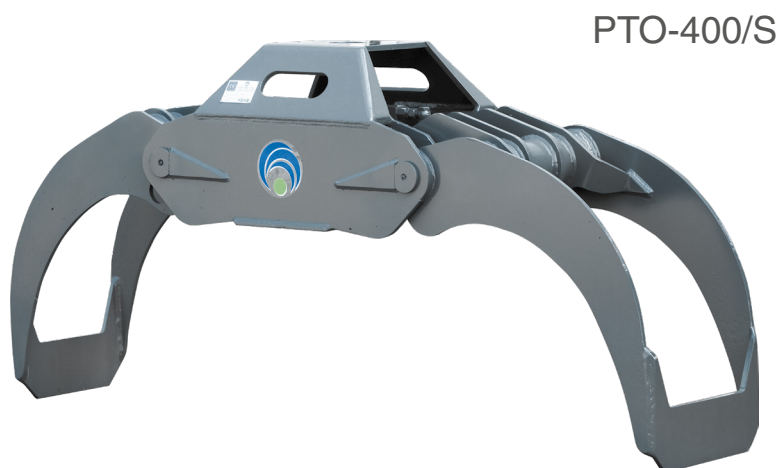



Professional log grapple

- Suitable for intense and industrial forestry applications.
- Wide opening with reduced overall dimensions when closed.
- Central cylinder and double compensation bar design gives a perfect balancing.
- Entirely made of DOMEX 690 and HB 400 steel.

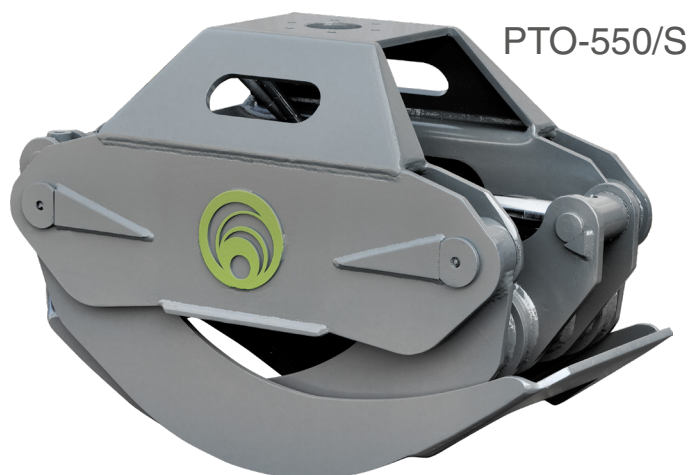

Model	Cap. m ²	Weight Kg	Max load daN	Max BAR	Ø A mm	B mm	C mm	D mm	E mm	F mm	G mm
PTO - 200/S	0,2	115	1500	220	75	520	650	1395	350	435	730
PTO - 300/S	0,3	165	2000	220	85	590	775	1590	425	510	850
PTO - 400/S	0,4	275	2500	220	110	630	830	1880	520	710	985
PTO - 550/S	0,55	420	4500	300	115	780	1050	2150	600	840	1120
PTO - 700/S	0,7	650	7000	300	145	975	1310	2700	750	1050	1400

Technical Data

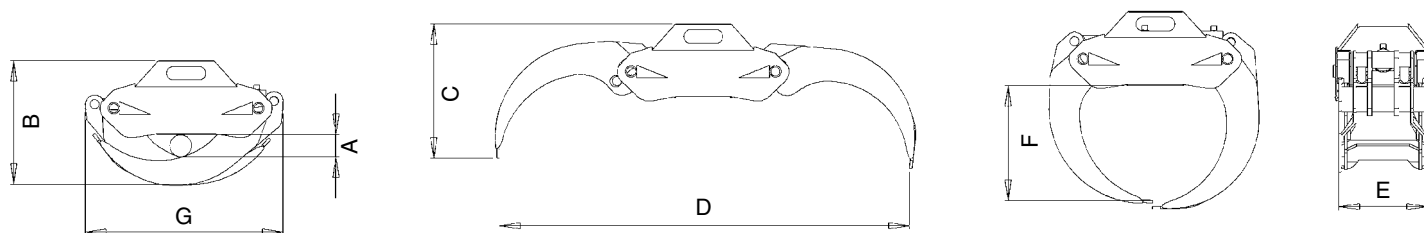

Accessories

Fixed head	Bolt-on head (without rotation)
GRM 4 T/F	Mechanical, free 250° rotation (without hydraulic supply)
GRI 4 T/SF	Hydraulic rotator
GRI 5 T/SF	Hydraulic rotator
GRI 6 T/SF	Hydraulic rotator
GRI 11 T/SF	Hydraulic rotator
GRI 17 T/SF	Hydraulic rotator
Top link for crane	Cardan suspension link for truck crane
Top link for excavator	Cardan suspension link for excavator