

Multipurpose grapple for rigid mounting





- High closing force; perfect balance due to the central cylinder design.
- Tines made of wear-resistant steel HB 400 and available in 2 versions, with 4 and 7 tips.
- Large opening and reduced overall dimensions when closed.
- Body made of high tensile steel, suitable to heavy-duty applications.



GRP 300-7



Model	Excav. Weight ton	Cap. m ²	Self weight Kg	Lifting capacity daN	Max BAR	Ø A mm	B mm	C mm	D mm	E mm	F mm	G mm
GRP 150-7	2 - 4	0,15	165	1000	220	80	710	815	1215	360	370	665
GRP 200-7	3 - 6	0,2	280	1500	220	80	760	905	1350	418	410	730
GRP 250-7	5 - 8	0,25	350	1600	220	80	790	910	1500	495	445	790
GRP 300-7	6 - 12	0,3	475	1750	300	100	815	995	1650	572	500	850
GRP 400-7	9 - 16	0,4	615	2000	300	120	930	1020	1800	650	570	980
GRP 500-7	16 - 23	0,5	950	3000	350	130	1025	1210	2050	700	640	1100

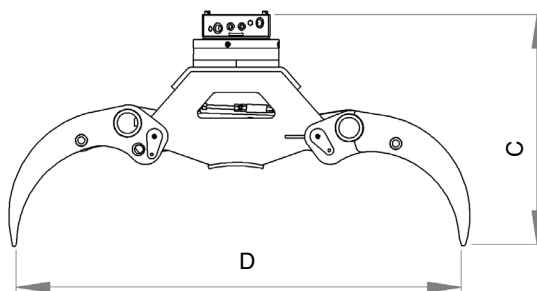


Accessories

GRI	Hydraulic continuous rotator 360°
Adapter	Bolt-on adapter for rigid mounting

Also available with:



4 tips:



4 tips and blade: